


Aquadopp Profiler 600 kHz

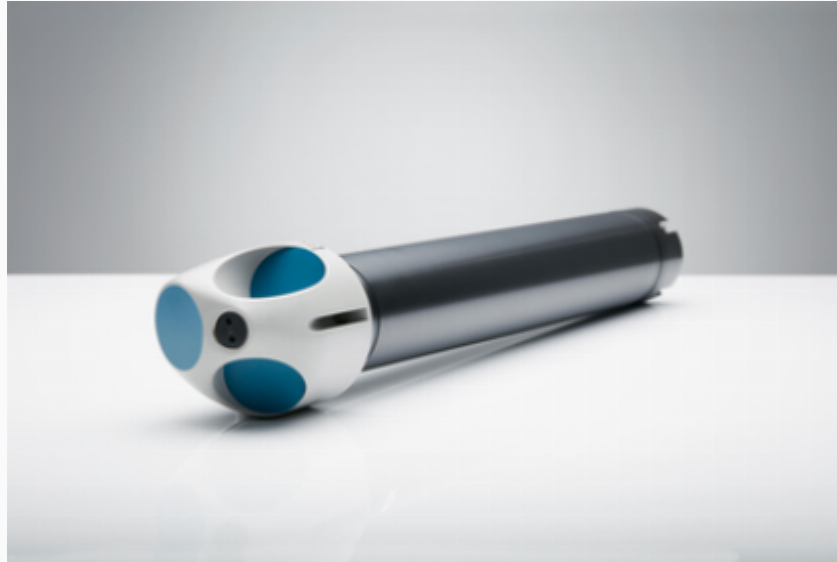

Up to 40 m current profiling range; easy to operate and deploy

The Aquadopp Profiler is a highly versatile Acoustic Doppler Current Profiler (ADCP) available in four profiling range options, from < 1 m to > 85 m. The 600 kHz version has a current profiling range of up to 40 m. Designed for simple yet powerful operation, this current profiler is packed with features used by engineers and researchers to enable accurate and effective hydrodynamic data collection in a variety of environmental conditions.

Aquadopp Profiler 600 kHz



Highlights

- ✓ Up to 40 m current profiling range
- ✓ Ideal for mean current measurements
- ✓ Easy to operate and deploy

Applications

- ✓ Mean flow measurements with high focus on ease of use and simplicity
- ✓ Measurements in flow regimes with strong variations in flow speeds
- ✓ Studies of tidal currents
- ✓ Measurements of combinations of waves and currents
- ✓ Suitable for wave buoys

Technical specifications

→ Water velocity measurements

Maximum profiling range	30-40 m
Cell size	1-4 m
Minimum blanking	0.50 m
Maximum number of cells	96
Measurement cell position	N/A
Default position (along beam)	N/A
Velocity range	±10 m/s
Accuracy	±1% of measured value ±0.5 cm/s
Velocity precision	Consult instrument software
Maximum sampling rate (output)	1 Hz
Internal sampling rate	4 Hz

→ Echo intensity (along slanted beams)

Sampling	Same as velocity
Resolution	0.45 dB
Dynamic range	90 dB
Transducer acoustic frequency	600 kHz
Number of beams	3
Beam width	3.0°

→ HR option

Maximum profiling range	N/A
Cell size	N/A
Minimum blanking	N/A
Maximum number of cells	N/A
Range/Velocity limitations	N/A
Accuracy	N/A
Max. sampling rate	N/A

→ Z-Cell option

Aquadopp Profiler 600 kHz

Cell zero acoustic frequency	N/A
------------------------------	-----

Maximum profiling range	N/A
-------------------------	-----

Number of beams	N/A
-----------------	-----

→ Sensors

Temperature:	Thermistor embedded in head
--------------	-----------------------------

Temp. range	-4 to +40 °C
-------------	--------------

Temp. accuracy/resolution	0.1 °C/0.01 °C
---------------------------	----------------

Temp. time response	10 min
---------------------	--------

Compass:	Magnetometer
----------	--------------

Accuracy/resolution	2°/0.1° for tilt < 20°
---------------------	------------------------

Tilt:	Liquid level
-------	--------------

Accuracy/resolution	0.2°/0.1°
---------------------	-----------

Maximum tilt	30°
--------------	-----

Up or Down	Automatic detect
------------	------------------

Pressure:	Piezoresistive
-----------	----------------

Range	0-100 m (inquire for options)
-------	-------------------------------

Accuracy/precision	0.5% FS / 0.005% of full scale
--------------------	--------------------------------

→ Analog inputs

No. of channels	2
-----------------	---

Supply voltage to analog output devices	Three options selectable through firmware commands: 1) Battery voltage/500 mA, 2) +5 V/250 mA, 3) +12 V/100 mA
---	--

Voltage input	0-5 V
---------------	-------

Resolution	16-bit A/D
------------	------------

→ Data recording

Capacity	9 MB, can add 4/16 GB
----------	-----------------------

Data record	9*Ncells + 32 bytes
-------------	---------------------

Diagnostics record	N/A
--------------------	-----

Wave record	Nsamples * 24 + 60 bytes
-------------	--------------------------

Mode	Stop when full (default) or wrap mode
------	---------------------------------------

→ Real-time clock

Accuracy	±1 min/year
----------	-------------

Aquadopp Profiler 600 kHz



→ Real-time clock

Backup in absence of power 4 weeks

→ Data communications

I/O RS-232 or RS-422

Communication baud rate 300-115200 Bd

Recorder download baud rate 600/1200 kBd for both RS-232 and RS-422

User control Handled via "Aquadopp" software, ActiveX® function calls, or direct commands with binary or ASCII data output

→ Connectors

Bulkhead MCBH-8-FS

Cable PMCIL-8-MP on 10m polyurethane cable

→ Software

Functions Deployment planning, instrument configuration, data retrieval and conversion (for Windows®)

→ Power

DC input 9-15 V DC

Maximum peak current 3 A

Avg. power consumption 0.06 W

Sleep current < 100 µA

Transmit power 0.3-20 W, 4 adjustable levels

→ Batteries

Battery capacity 1) 50 Wh (alkaline or Li-ion), 2) 165 Wh (lithium), 3) Single or dual

New battery voltage 13.5 V DC (alkaline)

→ Environmental

Operating temperature -5 to +40 °C

Storage temperature -20 to +60 °C

Shock and vibration IEC 721-3-6

EMC approval IEC 61000

Depth rating 300 m

→ Materials

Aquadopp Profiler 600 kHz



Standard model POM and polyurethane plastics with titanium fasteners

→ Dimensions

Maximum diameter 100 mm

Maximum length ~550 mm (single battery), +110 mm (double battery) depending on head configuration

→ Weight

Weight in air 2.9 kg

Weight in water 0.4 kg

→ Options

1) Alkaline, lithium or Li-ion external batteries, 2) Inquire for different head configurations